



FULLER


Vancouver (7:30am - 4:30pm PST)
9652 - 188th Street
Surrey BC V4N 3M2

☎ 604-882-9221
☎ 1-800-665-4825 (Toll Free)
☎ 604-882-9212
✉ surrey@fullerfasteners.com

Toronto (8:00am - 4:30pm EST)
6490 Kestrel Road
Mississauga, ON L5T 1Z7

☎ 905-670-8597
☎ 1-888-665-4825 (Toll Free)
☎ 905-670-7264
✉ toronto@fullerfasteners.com

ISO-FIT Hot Dipped Galvanized Fasteners

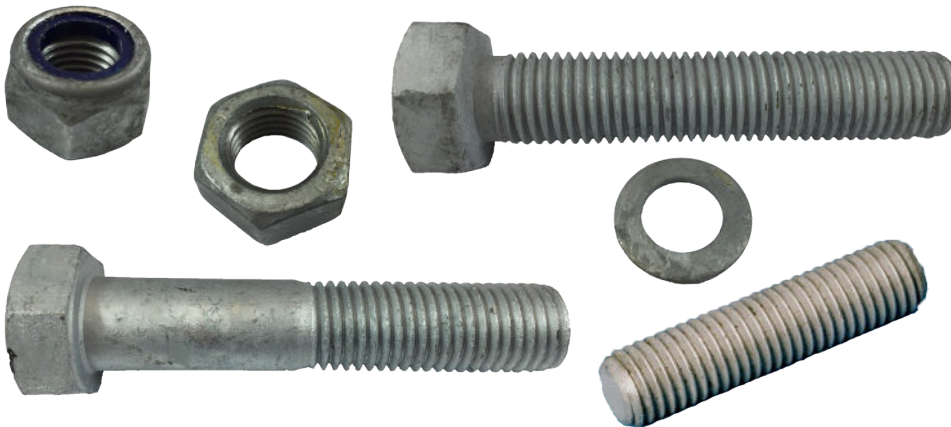

ISO-FIT externally threaded fasteners are rolled undersize so that they will accept a go-gauge with tolerance class 6h AFTER galvanizing. These fasteners can be used in any threaded hole WITHOUT having to tap the hole to oversize.

The corresponding ISO-FIT nuts, are threaded to a 6H tolerance class AFTER galvanizing so that they fit onto any threaded fastener.

**Not interchangeable with standard North American galvanized fasteners.*

Hot dipped galvanized DIN 934 nut on a
DIN 931 stainless steel bolt



Stainless steel DIN 934 hex nut on a DIN
931 ISO FIT hex bolt



**EN 14399 hot dipped galvanized structural bolts, nuts and washers available upon request.*

METRIC AND INCH FASTENERS

STEEL

STAINLESS

BRASS

NYLON

- **HEX HEAD**
- **SOCKET HEAD**
- **WASHERS**
- **NUTS**
- **MACHINE SCREWS**
- **THREADED RODS**
- **PINS AND KEYS**
- **TAPS AND DIES**
- **HOSE CLAMPS**

... AND MORE



WWW.FULLERFASTENERS.COM

VANCOUVER | TORONTO | SHANGHAI LOGISTICS

Hex Cap Screws

8.8 Grade

DIN 933
ISO 4017
ANSI B18.2.3.1M

Hex Cap Screws

8.8 Grade


DIN 931
ISO 4014
ANSI B18.2.3.1M

Fully Threaded (ISO FIT)

H101 — 933-8.8 Hot Dipped Galvanized

Partially Threaded (ISO FIT)

H121 — 931-8.8 Hot Dipped Galvanized

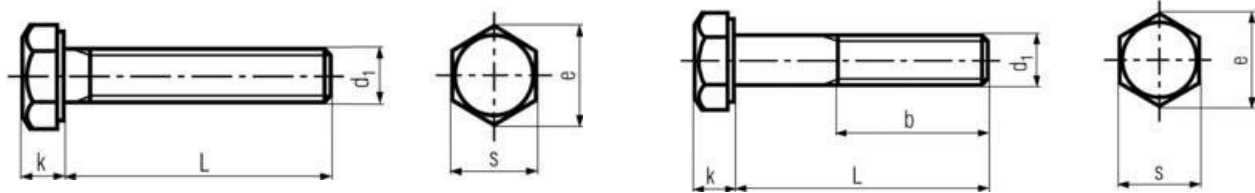

Diameter	M6		M8		M10		M12		M14		M16	
k	4		5.3		6.4		7.5		8.8		10	
s max	10		13		17		19		22		24	
e min	11.05		14.38		18.9		21.1		24.49		26.75	
b up to 125	18		22		26		30		34		38	
b up to 200	24		28		32		36		40		44	
Length (mm)	Full	Part	Full	Part	Full	Part	Full	Part	Full	Part	Full	Part
	H101	H121	H101	H121	H101	H121	H101	H121	H101	H121	H101	H121
12	100											
16	100		100									
20	100		100		100		100				50	
25	100		100		100		100				50	
30			100		100		100		50		50	
35	100		100		100		100		50		50	
40			100		100		100		50		50	
45					100		100		50		50	
50				100	100	100	100		50	50	50	
55								100		50	50	
60				100		100		100		50	50	
65								50		50		25
70			100	100		100	50	50		50		25
75								50				25
80			100	100		100	50	50		50		25
90				100		50	50	50		50		25
100				100		50		50		50		25
110												25
120				50				50				25
140								50				25
160								50				25
180												25
200												25
240												1
260												1
300												1
Order Number -> 933-8.8 HDG 6×20 = H101-006-0020 931-8.8 HDG 12×100 = H121-012-0100												

Hex Cap Screws

8.8 Grade

DIN 933
ISO 4017
ANSI B18.2.3.1M

Hex Cap Screws

8.8 Grade


DIN 931
ISO 4014
ANSI B18.2.3.1M

Fully Threaded (ISO FIT)

H101 — 933-8.8 Hot Dipped Galvanized

Partially Threaded (ISO FIT)

H121 — 931-8.8 Hot Dipped Galvanized

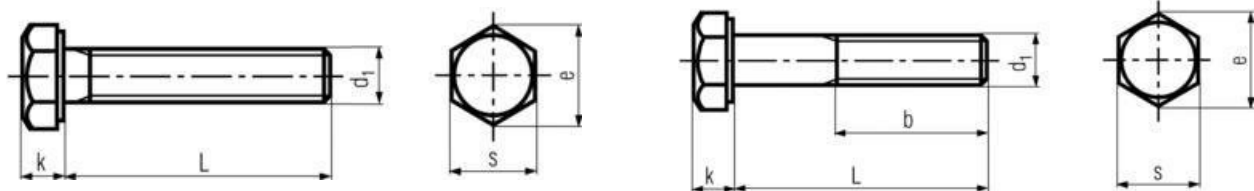

Diameter	M18		M20		M24		M27		M30	
k	11.5		12.5		15		17		18.7	
s max	27		30		36		41		46	
e min	30.14		33.53		39.98		45.2		50.85	
b up to 125	42		46		54		60		66	
b up to 200	48		52		60		66		72	
b over 200	61		65		73		79		85	
Length (mm)	Full	Part	Full	Part	Full	Part	Full	Part	Full	Part
	H101	H121	H101	H121	H101	H121	H101	H121	H101	H121
40	25		25		10					
45	25		25		10					
50	25		25		10					
55			25		10					
60	25		25		10				1	
65				25						
70	25		25		10		5		1	
80	25		25						1	
90		25		25		10			1	
100		25	25	25		10	5		1	
110				10		10				
120		25	10	10		10		5		1
140		25		10		10		5		1
160				10		10		5		1
180				10		10				1
200				10						1
220						1				
240				1		1				
260				1		1				
280				1		1				
300				1	1	1				
Order Number -> 933-8.8 18×60 H.D.G. = H101-018-0060 931-8.8 24×200 H.D.G. = H121-024-0200										



FULLER


Vancouver • Toll Free: 1-800-665-4825 • Fax: 604-882-9212

www.fullerfasteners.com

Lock Washers

Spring Steel

DIN 127B



Form “B” (ISO FIT)


W140 — 127B Hot Dipped Galvanized

For Screw	d ₁ min	d ₂ max	s +/- 0.1	Pkg.	Order #
M6	6.1	11.8	1.6	100	W140-006-0000
M8	8.1	14.8	2	100	W140-008-0000
M10	10.2	18.1	2.2	100	W140-010-0000
M12	12.2	21.1	2.5	100	W140-012-0000
M14	14.2	24.1	3	100	W140-014-0000
M16	16.2	27.4	3.5	100	W140-016-0000
M18	18.2	29.4	3.5	100	W140-018-0000
M20	20.2	33.6	4	100	W140-020-0000
M24	24.5	40.0	5	50	W140-024-0000
M27	27.5	43.0	5	50	W140-027-0000
M30	30.5	48.2	6	50	W140-030-0000

Flat Washers

Steel

DIN 126

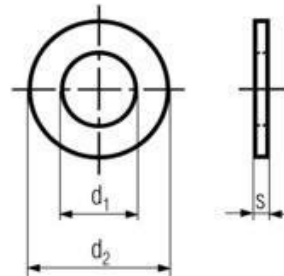

Coarse Without Chamfer (ISO FIT)


W113 — 126 Hot Dipped Galvanized

For Screw	d ₁	d ₂	s	Pkg.	Order #
M6	6.6	12	1.6	100	W113-006-0000
M8	9	16	1.6	100	W113-008-0000
M10	11	20	2	100	W113-010-0000
M12	13.5	24	2.5	100	W113-012-0000
M14	15.5	28	2.5	100	W113-014-0000
M16	17.5	30	3	100	W113-016-0000
M18	20	34	3	100	W113-018-0000
M20	22	37	3	100	W113-020-0000
M22	23	39	3	100	W113-022-0000
M24	26	44	4	50	W113-024-0000
M27	30	50	4	50	W113-027-0000
M30	33	56	4	50	W113-030-0000

Hex Nuts

Class 8

DIN 934
ANSI B18.2.4.1M

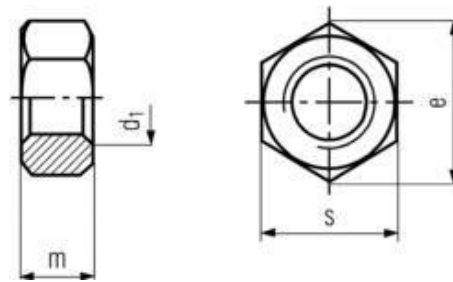

*Coarse Thread (ISO FIT)

N110 — 934-8 Hot Dipped Galvanized


d _i	s max.	e min.	m max.	Pkg.	Order #
M6	10	11.05	5	100	N110-006-0000
M8	13	14.38	6.5	100	N110-008-0000
M10	17	18.9	8	100	N110-010-0000
M12	19	21.1	10	100	N110-012-0000
M14	22	24.49	11	100	N110-014-0000
M16	24	26.75	13	100	N110-016-0000
M18	27	29.56	15	50	N110-018-0000
M20	30	32.95	16	50	N110-020-0000
M22	32	35.03	18	50	N110-022-0000
M24	36	39.55	19	50	N110-024-0000
M27	41	45.2	22	25	N110-027-0000
M30	46	50.85	24	25	N110-030-0000

*Tapped to oversize nuts for North American system are also available in stock.

Lock Nuts

Class 8

DIN 985
ANSI B18.16.3M

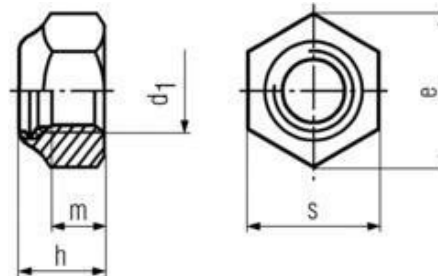

With Nylon Insert (ISO FIT)

N120 — 985-8 Hot Dipped Galvanized

d _i	s	e min.	m	h max.	Pkg.	Order #
M10	17	18.9	6.5	10	100	N120-010-0000
M12	19	21.1	8	12	100	N120-012-0000
M16	24	26.75	10.5	16	100	N120-016-0000
M20	30	32.95	14	20	50	N120-020-0000

FULLER Dual Lock Washers

Tolerances and mechanical specifications comparable to Nord-Lock®, Twin-Lock® and Heico-Lock® brand locking washers.

GEOMET® surface coating.

Metric sizes from M3 - M130
Inch sizes from #5 - 3"



Threaded Rod


DIN 975

Grade 8.8

1 Meter Lengths

Coarse Thread (ISO FIT)

R103 — 975-8.8 Hot Dipped Galvanized

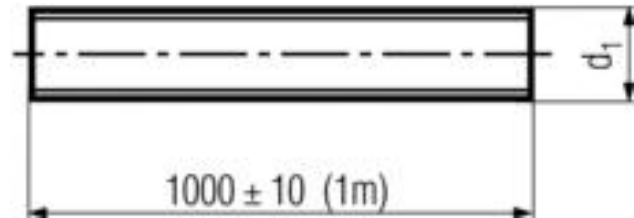

Diameter	Pkg.	Order #
M8	1	R103-008-0000
M10	1	R103-010-0000
M12	1	R103-012-0000
M14	1	R103-014-0000
M16	1	R103-016-0000
M18	1	R103-018-0000
M20	1	R103-020-0000
M22	1	R103-022-0000
M24	1	R103-024-0000
M30	1	R103-030-0000

FULLER Dual Lock Washers

Tolerances and mechanical specifications comparable to Nord-Lock®, Twin-Lock® and Heico-Lock® brand locking washers.


GEOMET® surface coating.

Metric sizes from M3 - M130
Inch sizes from #5 - 3"



931-10.9 Large Diameter Hex Bolts with Extended Threads

These high quality fasteners are custom made from 4140 material with extended rolled threads. This allows these fasteners to be used for a larger range of length applications with minimal modification.

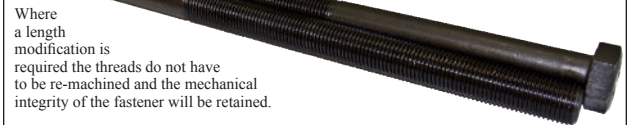

Where a length modification is required the threads do not have to be re-machined and the mechanical integrity of the fastener will be retained.

ANSI B18.15 Type 2 Shoulder Pattern Eye Bolts

Working Load Limit and Lift Direction Stamps

UNC sizes from 1/4" to 2"

Full traceability



FULLER is a master distributor of HOLO-KROME® fasteners



We are able to supply special manufactured short runs of non-standard items in a wide range of materials.



Featuring premium quality YFS® brand socket products

Socket Cap Screws
Flat Head Countersunk Screws
Button Head Screws
Shoulder Bolts
Set Screws

ISO/TS16949 Certified
(Full certification available on request)

Premium quality product at commodity price levels

