




FULLER

**Large Diameter Hex Bolts with Extended Threads
& Long Fine Full Thread - Hex & Sockets**



**ISO 4017 / ISO 4014
DIN 933 / DIN 931
GRADE 10.9 (4140 Material)
Stocked upto M64 x 800mm**

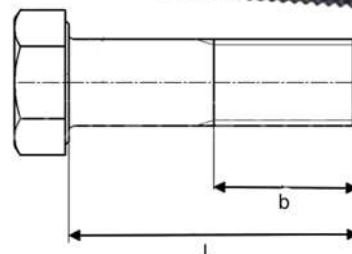

H003-012-0150	M12 x 150 mm	Full Thread	
H003-012-0200	M12 x 200 mm	Full Thread	
H003-014-0200	M14 x 200 mm	Full Thread	
H003-016-0150	M16 x 150 mm	Full Thread	
H003-016-0200	M16 x 200 mm	Full Thread	
H023-016-0400-S	M16 x 400 mm	200mm Thread	b Min 57, L Min 257
H023-016-0500-S	M16 x 500 mm	200mm Thread	b Min 57, L Min 357
H023-016-0700-S	M16 x 700 mm	300mm Thread	b Min 57, L Min 457
H023-018-0300-S	M18 x 300 mm	150mm Thread	b Min 61, L Min 211
H023-018-0400-S	M18 x 400 mm	200mm Thread	b Min 61, L Min 261
H023-018-0500-S	M18 x 500 mm	200mm Thread	b Min 61, L Min 361
H023-018-0700-S	M18 x 700 mm	300mm Thread	b Min 61, L Min 461
H003-020-0200	M20 x 200 mm	Full Thread	
H003-020-0300	M20 x 300 mm	Full Thread	
H023-020-0400-S	M20 x 400 mm	200mm Thread	b Min 65, L Min 265
H023-020-0500-S	M20 x 500 mm	200mm Thread	b Min 65, L Min 365
H023-020-0600-S	M20 x 600 mm	200mm Thread	b Min 65, L Min 465
H023-020-0800-S	M20 x 800 mm	300mm Thread	b Min 65, L Min 565
H004-022-0200	M22 x 1.5 x 200mm	Fine Full Thread	
H023-022-0300-S	M22 x 300 mm	150mm Thread	b Min 69, L Min 219
H023-022-0400-S	M22 x 400 mm	200mm Thread	b Min 69, L Min 269
H023-022-0500-S	M22 x 500 mm	200mm Thread	b Min 69, L Min 369
H023-022-0700-S	M22 x 700 mm	300mm Thread	b Min 69, L Min 469
H003-024-0200	M24 x 200 mm	Full Thread	
H003-024-0300	M24 x 300 mm	Full Thread	
H004-024-0300	M24 x 2 x 300mm	Fine Full Thread	
H023-024-0400-S	M24 x 400 mm	200mm Thread	b Min 73, L Min 273
H023-024-0500-S	M24 x 500 mm	200mm Thread	b Min 73, L Min 373
H023-024-0600-S	M24 x 600 mm	200mm Thread	b Min 73, L Min 473
H023-024-0800-S	M24 x 800 mm	300mm Thread	b Min 73, L Min 573
H003-027-0200	M27 x 200 mm	Full Thread	
H004-027-0300	M27 x 2 x 300mm	Fine Full Thread	
H023-027-0400-S	M27 x 400 mm	300mm Thread	b Min 79, L Min 179
H023-027-0500-S	M27 x 500 mm	300mm Thread	b Min 79, L Min 279
H023-027-0800-S	M27 x 800 mm	400mm Thread	b Min 79, L Min 479

* b Min = Minimum Thread required
L Min = Minimum Length required to maintain b Min

These high quality fasteners are custom made from 4140 material (10.9) with extended factory rolled threads. This allows these fasteners to be used for a larger range of length applications with minimal modification.

Where a *length modification* (cut off) is required the threads do not have to be re-machined. The mechanical integrity of the fastener will be retained. (For part thread bolts, b Min and L Min must be maintained.)




FULLERFASTENERS.COM
VANCOUVER | TORONTO

Large Diameter Hex Bolts (continued)

ISO 4017 ISO 4014 DIN 933 DIN 931 GRADE 10.9 (4140 Material)

H003-030-0170	M30 x 170 mm	Full Thread	
H004-030-0170	M30 x 2 x 170mm	Fine Full Thread	
H003-030-0200	M30 x 200 mm	Full Thread	
H003-030-0240	M30 x 240 mm	Full Thread	
H003-030-0300	M30 x 300 mm	Full Thread	
H004-030-0300	M30 x 2 x 300mm	Fine Full Thread	
H023-030-0340-S	M30 x 340 mm	140mm Thread	b Min 85, L Min 285
H023-030-0400-S	M30 x 400 mm	200mm Thread	b Min 85, L Min 285
H023-030-0500-S	M30 x 500 mm	200mm Thread	b Min 85, L Min 385
H023-030-0600-S	M30 x 600 mm	200mm Thread	b Min 85, L Min 485
H023-030-0700-S	M30 x 700 mm	300mm Thread	b Min 85, L Min 485
H023-030-0800-S	M30 x 800 mm	300mm Thread	b Min 85, L Min 585
H003-033-0200	M33 x 200 mm	Full Thread	
H004-033-0300	M33 x 2 x 300mm	Fine Full Thread	
H023-033-0500-S	M33 x 500 mm	300mm Thread	b Min 91, L Min 291
H023-033-0540-S	M33 x 540 mm	100mm Thread	b Min 91, L Min 531
H023-033-0800-S	M33 x 800 mm	400mm Thread	b Min 91, L Min 491
H003-036-0200	M36 x 200 mm	Full Thread	
H003-036-0300	M36 x 300 mm	Full Thread	
H004-036-0300	M36 x 3 x 300mm	Fine Full Thread	
H023-036-0400-S	M36 x 400 mm	200mm Thread	b Min 97, L Min 297
H023-036-0500-S	M36 x 500 mm	200mm Thread	b Min 97, L Min 397
H023-036-0600-S	M36 x 600 mm	200mm Thread	b Min 97, L Min 497
H023-036-0800-S	M36 x 800 mm	300mm Thread	b Min 97, L Min 597
H003-039-0200	M39 x 200 mm	Full Thread	
H003-039-0250	M39 x 250 mm	Full Thread	
H023-039-0300-S	M39 x 300 mm	150mm Thread	b Min 103, L Min 253
H004-039-0300	M39 x 2 x 300mm	Fine Full Thread	
H023-039-0400-S	M39 x 400 mm	200mm Thread	b Min 103, L Min 303
H023-039-0700-S	M39 x 700 mm	350mm Thread	b Min 103, L Min 453
H003-042-0300	M42 x 300 mm	Full Thread	
H023-042-0400-S	M42 x 400 mm	150mm Thread	b Min 109, L Min 359
H023-042-0500-S	M42 x 500 mm	250mm Thread	b Min 109, L Min 359
H023-042-0800-S	M42 x 800 mm	400mm Thread	b Min 109, L Min 509
H003-045-0300	M45 x 300 mm	Full Thread	
H023-045-0500-S	M45 x 500 mm	250mm Thread	b Min 115, L Min 365
H023-045-0800-S	M45 x 800 mm	400mm Thread	b Min 115, L Min 515
H003-048-0300	M48 x 300 mm	Full Thread	
H023-048-0500-S	M48 x 500 mm	250mm Thread	b Min 121, L Min 371
H023-048-0700-S	M48 x 700 mm	400mm Thread	b Min 121, L Min 421
H023-048-0800-S	M48 x 800 mm	400mm Thread	b Min 121, L Min 521
H003-056-0400	M56 x 400 mm	Full Thread	
H023-056-0600-S	M56 x 600 mm	400mm Thread	b Min 137, L Min 337
H023-056-0800-S	M56 x 800 mm	400mm Thread	b Min 137, L Min 537
H003-064-0400	M64 x 400 mm	Full Thread	
H023-064-0600-S	M64 x 600 mm	400mm Thread	b Min 153, L Min 353
H023-064-0800-S	M64 x 800 mm	400mm Thread	b Min 153, L Min 553

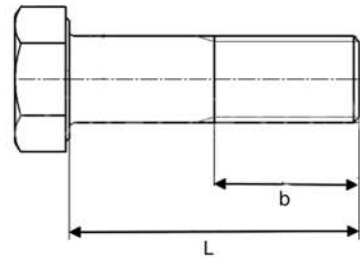

* b Min = Minimum Thread required
L Min = Minimum Length required to maintain b Min

Large Diameter Socket Cap Screws with Extended Threads

ISO 12474 DIN 912 12.9 200mm Fine Thread

S013-016-0200-S	M16 x 1.5	Full Thread
S013-020-0200-S	M20 x 1.5	Full Thread
S013-022-0200-S	M22 x 1.5	Full Thread
S013-024-0200-S	M24 x 2	Full Thread
S013-030-0200-S	M30 x 2	Full Thread
S013-036-0200-S	M36 x 3	Full Thread

